



on-site disinfection system

MODEL OZCLO SW10-20-30-40-50

OZONE

HYDROGEN PEROXIDE

ACTIVE CHLORINE

SWIMMING POOLS SYSTEM

NO SMELL OF CHLORINE

NO REDDENED EYES

NO SKIN DAMAGE

NO IRRITATION OF MUSCOSA

FULL AUTOMATIC CONTROL

SIMPLE INSTALLATION

**NO USE OF DANGEROUS AND
HARMFUL CHEMICAL**




O3


H2O2

CLO

Hydrolic connection

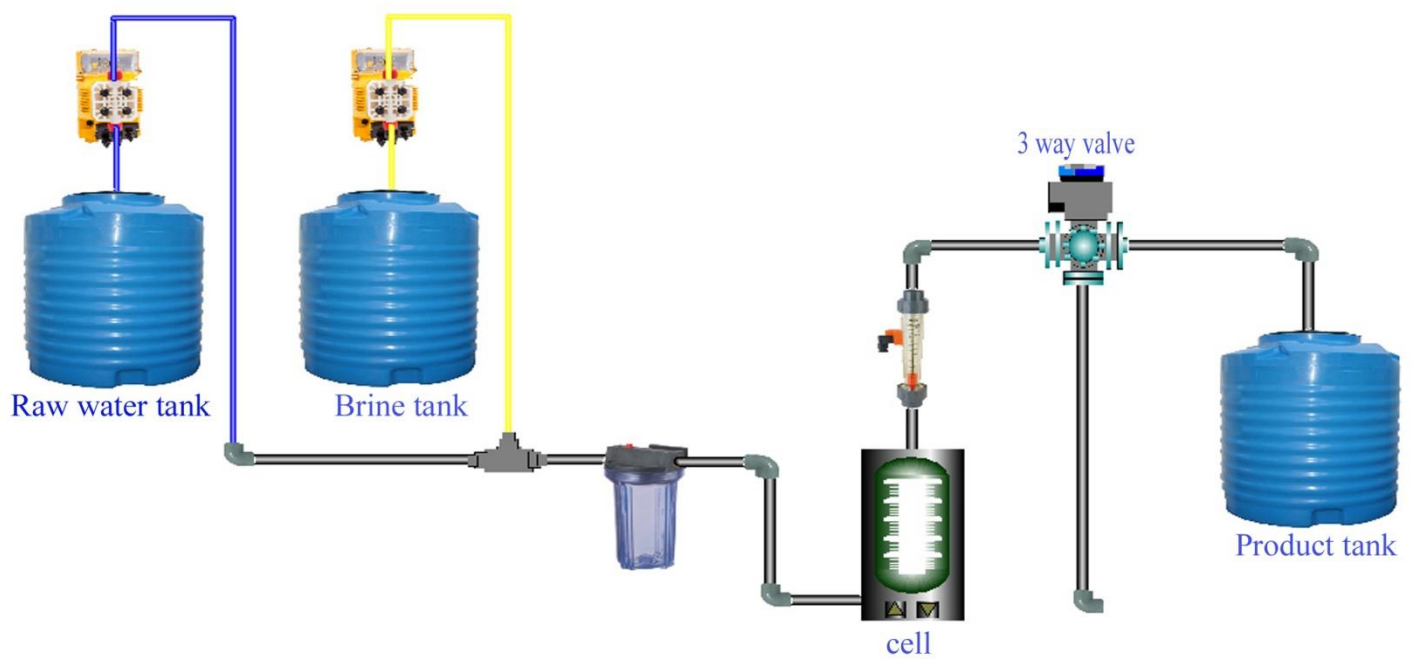

Installation Methode

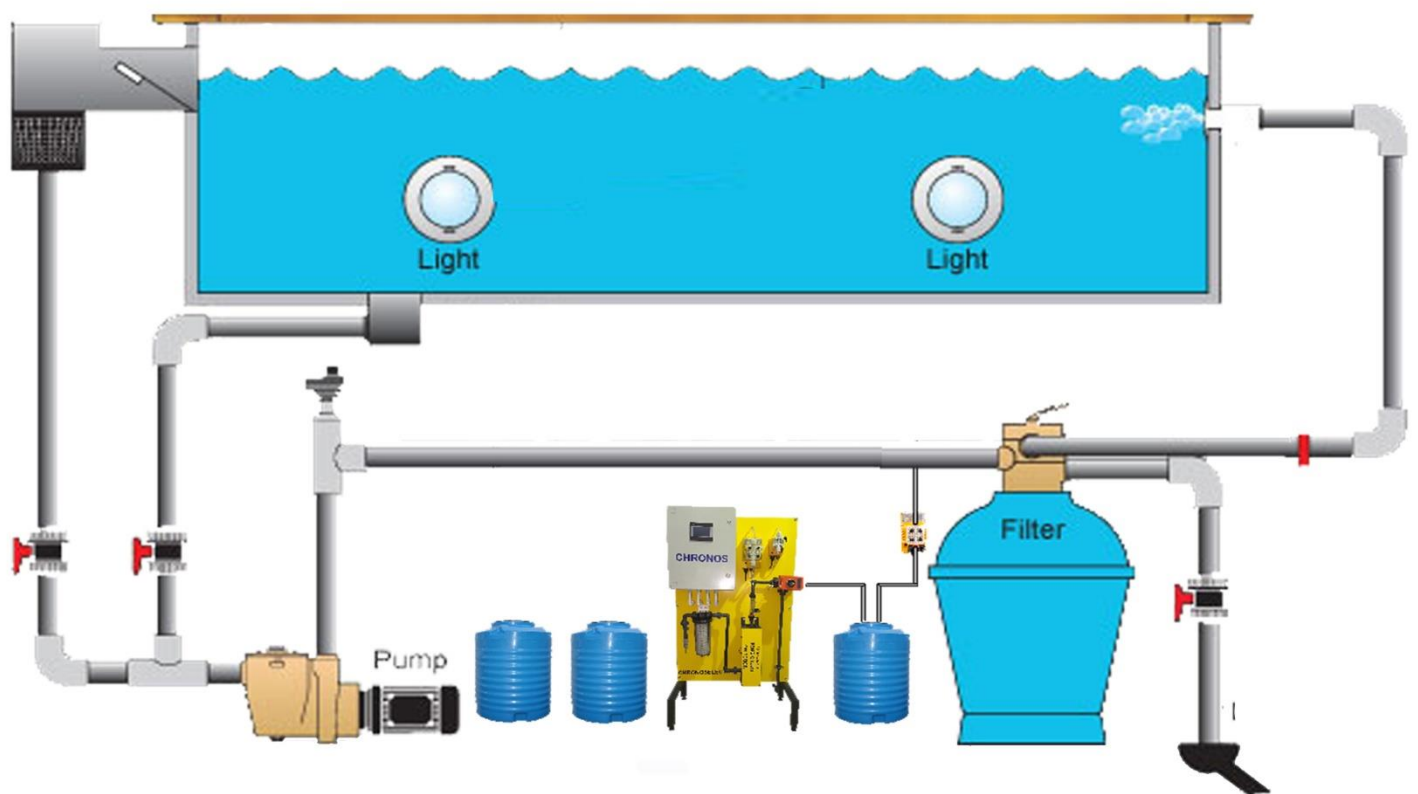

Technical information table 1

MODEL	SYSTEM CAPACITY L/H	POOL CAPACITY M3	FREE CHLORINE	OZONE	HYDROGEN PEROXIDE
OZCLO-SW10	10	10-20	1-1.5PPM	0.7-1PPM	0.5-0.7PPM
OZCLO-SW20	20	20-30			
OZCLO-SW30	30	30-40			
OZCLO-SW40	40	40-50			
OZCLO-SW50	50	50-60			
OZCLO-SW60	60	60-80			

Technical information – table 2

MODEL	CURRENT	CURRENT SETTING	WORKING VOLTAGE V	POWER CONSUMPTION WAT	SALT CONSUMPTION g/H
OZCLO-SW10	6	MAX=8	10	100	20-40
OZCLO-SW20	6		20	200	40-80
OZCLO-SW30	6	HIGH=6	30	250	60-120
OZCLO-SW40	6		40	300	80-160
OZCLO-SW50	6	LOW=5	50	350	100-200
OZCLO-SW60	6		60	450	120-240